

## MOUNTED SPEAKER CABLES

*with RED SERIES banana plugs*

RED Series pre-assembled speaker cables are designed to optimize signal transmission between your amplifier and your speakers. The combination of selected materials and sophisticated technical architecture guarantees faithful reproduction of your musical universe.

The RED Series range is designed for demanding audiophiles who want to preserve signal purity in a high-fidelity setup.

AVAILABLE  
LENGTHS

2x3m  
2x5m



With a total cross-section of  $2 \times 2.5 \text{ mm}^2$ , the conductor core consists of a total of 7 strands, each composed of 32 OFC (Oxygen Free Copper) strands. This type of copper, produced using a specific protocol that ensures the absence of oxygen, achieves a purity level of 99.99%. The result is smooth and accurate signal transmission.

The structure and braiding of the strands induce a sense of conductivity, so the sheath is arrowed to follow the direction of the signal, from your amplifier to your speakers.

The insulation is established on two distinct levels:

- Internal insulation consisting of a triple layer combining cotton and flexible PVC to preserve conductive properties while limiting electromagnetic interference.
- External insulation consisting of a PVC core covered with a braided textile sheath to protect against external physical damage.

RED Series speaker cables are pre-assembled with banana plug connectors, making installation easy. The standard plug diameter (3.6 mm) ensures compatibility with all available hi-fi equipment. The gold plating covering the end of the plug ensures optimal conductivity.

Available in lengths of 3 or 5 metres, the RED Series cable meets high-fidelity requirements and is the ideal companion for your installations, offering accuracy and refinement.



## TECHNICAL SPECIFICATIONS

### BRAIDED COTTON SHEATH

### PVC INSULATION

### TRIPLE INSULATION

Cotton Sheet

Cotton insulation


PVC Sheath

### COPPER SECTION

99,99% OFC

2,5 mm<sup>2</sup> / 13 AWG x2

7 braids of 32 strands

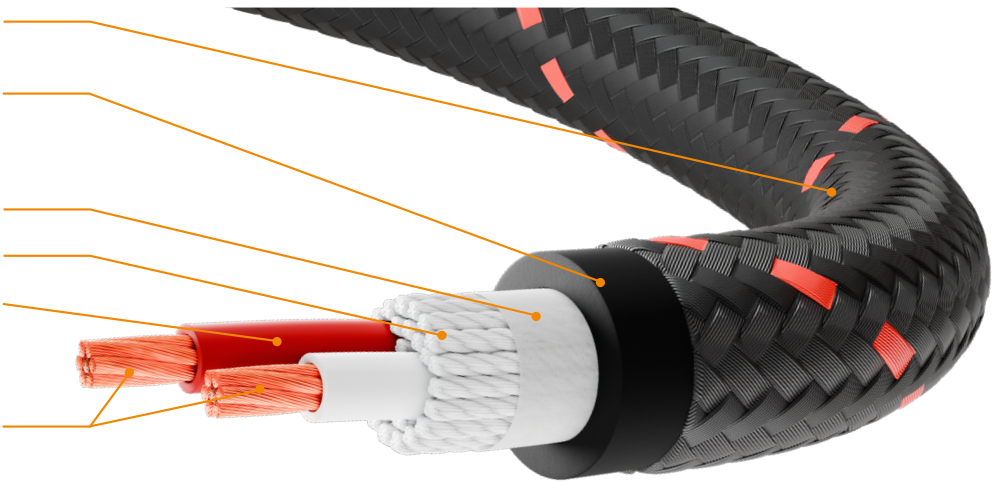

### BANANA PLUGS BP 450


Ø 3,6mm - Gold-plated




TRIPLE  
INSULATION



MULTI-STRAND




OXYGEN  
FREE COPPER



BANANA PLUGS



SIGNAL  
DIRECTION



BANANA PLUGS  
GOLD-PLATED

### LOGISTICS INFORMATION

EAN : 3m - 3660216018182

EAN : 5m - 3660216018212

Net Weight: 0,78 kg

Net Weight: 1,21 kg

Packaging Dimensions : L240 x H240 x D75mm